


## Recycled PET Tape

# Dunplon™ Recycle No.3002RC

Tape for packaging that using recycled PET film as base material.

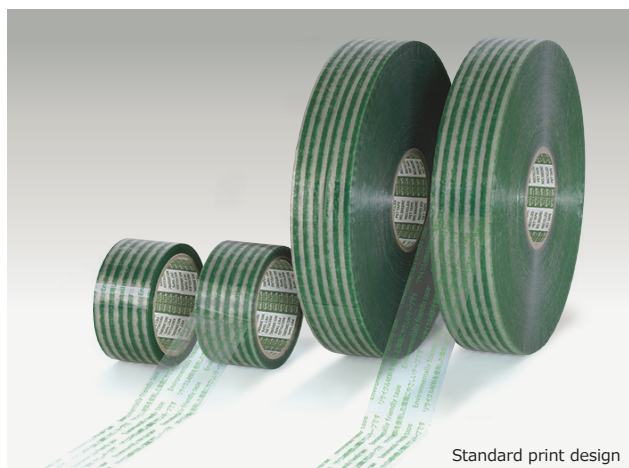

Standard print design

### Features

- Tape for packaging using recycled PET film (PCR※ 100%) as base material. ※ PCR : Post Consumer Recycled
- Environmentally friendly adhesive. ※No organic solvents are used in the tape manufacturing process
- Promote sustainability initiatives with standard printing ※No organic solvents are used in printing ink.
- Excellent cardboard sealing properties

### Applications

- For packaging carton board

### Environmental indicators

- Recycled material rate of tape = 60%
- CO<sub>2</sub> reduction rate = 11% ※  
※This is an example of comparison with our products based on our calculations.  
※Cannot be compared with other companies' products.

### Property

Item	Unit	No.3002RC
Thickness	mm	0.045
Adhesion	N/25mm	13.00
Holding power	mm/30min	0.1
Unwinding force	N/25mm	1.0
Tensile Strength	N/25mm	115
Elongation	%	160
Base material	—	Recycled PET film

※The above characteristics values represent measured examples, not guarantees.

### Print design · Color

No.3002RC	
Print design	Standard print design <small>用した環境にやさしいテープです リサイクル材料を使用し  <small>Environmentally friendly tape Environmentally friendly  <small>リサイクル材料を使用した環境にやさしいテープです  <small>Environmentally friendly tape Environmen  <small>用した環境にやさしいテープです リサイクル材料を使用し</small></small></small></small></small>
	—
Color	—

### Size · Quantity of rolls

Size		Rolls/case
Width (mm)	Length (m)	No.3002RC
50	50	50
	1000	5



### Precautions when using

- Remove all oil, moisture and dirt from the surface of the substrate before applying.
- Since the tape is pressure-sensitive adhesive, be sure to apply enough pressure with a roller or press when applying. Otherwise it might be affected to its properties and appearance.
- The tape may not adhere well to extremely uneven or distorted surfaces. Enough Leveling off the surface should be required before applying.
- It takes certain time to get full adhesive strength after applying, keep away the tape from any stress for a several hours after applying.